


Agitator

Description

The Agitator A FIX R PR 185 580 has been designed for preparation of paint before application or to prevent paint settling during spraying. It is suitable for 60 liter barrels. Various stainless steel propellers are available

and revolution speed regulation enables easy operation. A pneumatic drive allows safe use in a paint shop environment.

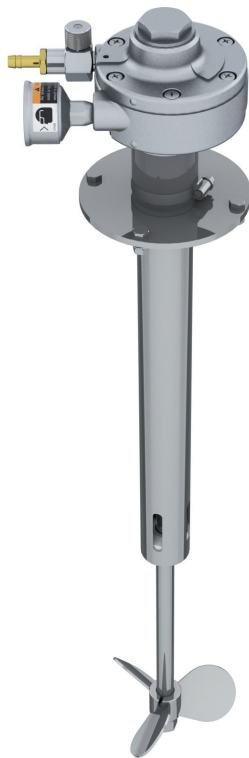

Customer Benefits

- » Suitable for paint shops
- » Different propellers available
- » Revolution speed regulation
- » Stainless steel shaft and propeller
- » Easy operation
- » ATEX Ex II 2G



Agitator A FIX R PR 185 580 N68040285


Specification

Weight	4,2 kg
Diameter Blades	127 mm (5")
Geometry Blades	Propeller
Diameter Shaft	40 mm (1,6")
Length Shaft	580 mm (22,8")
Parts contacted by media	Stainless Steel
Drive type	Pneumatic
Operation	Fix
Connector Air	DN 8
Rated Power	0,7 kW
Operating Pressure	1-7 bar (14,4-101,5 psi)
Air consumption @ 7bar	265 NI/min (9,4 sft ³ /m)
Speed Range	100-1.000 rpm
ATEX Marking	Ex II 2G


Accessories

Part No.	Description
E04030005	Earthing line
W32020045	Oil 0,2 l
M04620005	Propeller TSP 15/167 U
M04620006	Propeller T 15/167 U
M04260007	Propeller [5" U]

Dimensions

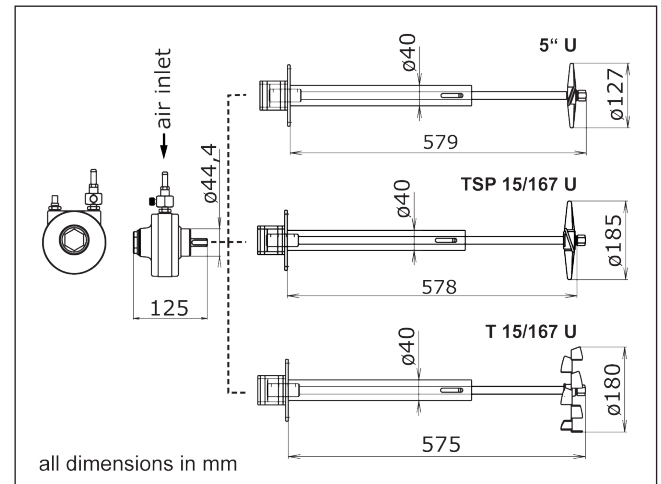

Characteristics

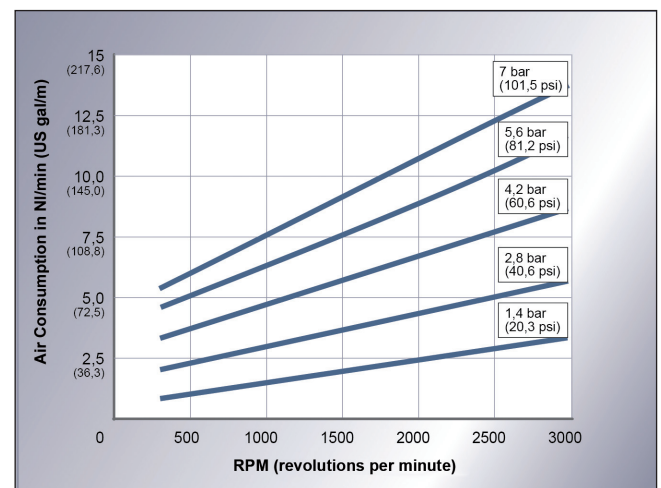

Further Information

For optional blade diameters see footprint.

If you require further information please do not hesitate to contact our Sales Team at +49 7142 78-0 or Industrial.Products@durr.com