

EcoGun 246

Manual Air Spray Gun Pressure-Feed

Description

The **EcoGun 246** is a perfectly balanced, ultra-light manual air spray gun with pressure paint feeding. It has been designed for high quality final coatings and offers a wide range of coating mediums such as top

coats, base coatings, primers, glues and other atomizing materials. The **EcoGun 246** is suitable for use in the furniture industry, for machine plants and numerous other industrial sectors.



Customer Benefits

- » Nickel plated body for easy cleaning and durability
- » Ensured conductivity of the spray gun body for safe grounding
- » Perfectly balanced ergonomic shape of spray gun body that minimizes fatigue
- » Various material connections
- » Wide range of nozzle sizes
- » Special nozzles and air caps for abrasive materials
- » ATEX EX II 2G T60°C X



EcoGun AS MAN 1PS N36200008V

Specification

Weight	470 g
Material Gun Body	Alumium nickel-plated
Parts contacted by media	Stainless steel
Connector Fluid	M14x1,5 / 3/8" UNI
Connector Air	1/4" UNI
Recom. Air Pressure	2,5 - 3,5 bar (36 - 51 psi)
Air Pressure max.	6,0 bar (87 psi)
Fluid Pressure max.	6,0 bar (87 psi)
Operating temperature max.	60 °C (140 °F)
ATEX Marking	Ex II 2G T60°C X


Accessories

Part No.	Description
M58100104	Hose connection M14x1,5 6/4
M58100105	Hose connection M14x1,5 8/6
M01010185	Connector air D7,2 d10/12 EU
M01010186	Connector air D5 d8/11 US
M01010187	Connector air D7,5 d11/13 Asia
N36960088	Ring kit, 5 colors
N36960038	Cleaning kit EcoGun 22pcs

Nozzle Selection

Air Cap	Nozzle diameters [mm] / Media
AL	1,0 / 1,2 Top coats, mordant
PS	1,4 / 1,8 / 2,2 Abrasive paints e.g. zinc paints
PC	1,0 / 1,2 / 1,4 / 1,6 / 1,8 / 2,2 General paints, primers or fillers

Characteristics

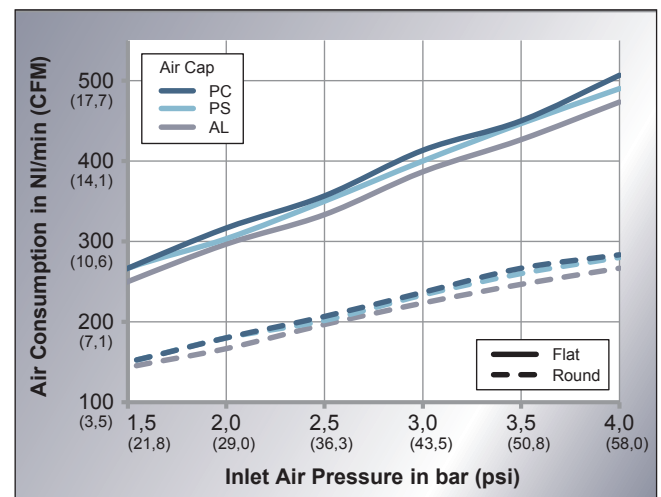

Further Information

Final weight depending on configuration.

If you require further information please do not hesitate to contact our Sales Team at +49 7142 78-0 or Industrial.Products@durr.com